


## Accessories PCB Relay Card Relay RP I

and similar design: pinning 2.5 mm

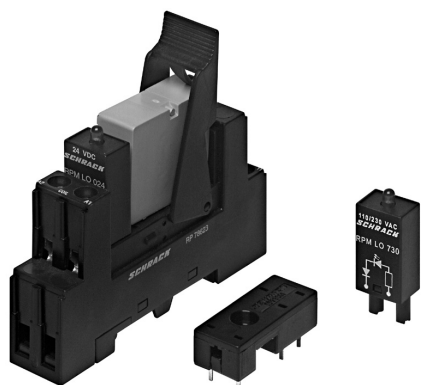

F0227-A


### Features

- Socket with PCB- or screw terminals
- No reduction of protection class or creepage / clearance with plastic retainer
- Easy replacement of relays
- Socket can be used as connector for diagnosis function

Dimensions in mm  
View on solder pins

## Socket with screw-type terminals for DIN-rail mounting

F0118-A

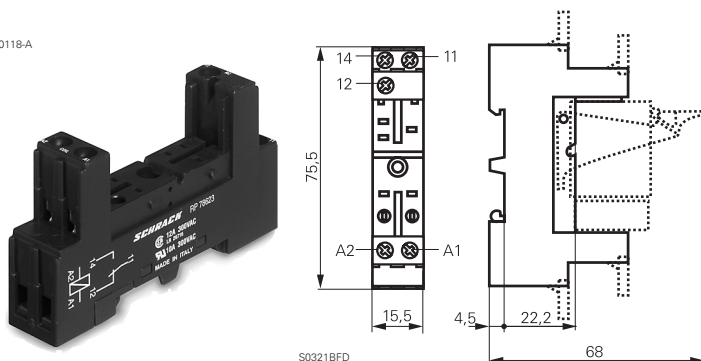

S03218FD

**RP 78 623** Socket with screw-type terminals, pinning 2.5 mm, for DIN-rail mounting



### Technical data

Rated current	12 A
Rated voltage	300 Vac
Dielectric strength coil/cont.	>4000 V <sub>rms</sub>
Insulation cat. (VDE 0110b)	C / 250 Vac
Ambient temperature	-25...+85 °C
Protection category	IP 20
Protection against accidental contact meets	VBG 4
Wire cross section with bootlace crimp	2 x 2.5 mm <sup>2</sup> 2 x 1.5 mm <sup>2</sup>
Packaging unit	10 pcs.

### Socket with screw-type terminals for DIN-rail mounting

Product code

**RP 78 623** Socket with screw-type terminals, pinning 2.5 mm for DIN-rail mounting

### Accessories for RP 78 623

Ordering code Type

**RP 16 104** Plastic retaining clip


**RP 16 040** Marking tag

**RP M** Modules see accessories RT / RP

## Socket with PCB terminals



F0137-A

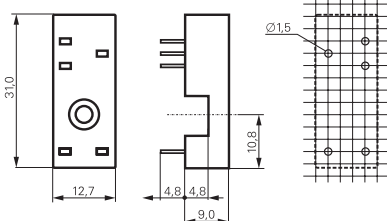

S0322-AE

**RP 78 600** Socket with PCB terminals, pinning 2.5 mm



### Technical data

Rated current	12 A
Rated voltage	300 Vac
Dielectric strength coil/cont.	>5000 V <sub>rms</sub>
Insulation cat. (VDE 0110b)	C / 250 Vac
Ambient temperature	-40...+80 °C
Packaging unit	100 pcs.

### Socket with PCB terminals

Product code

**RP 78 600** Socket with PCB terminals, pinning 2.5 mm

### Accessories for RP 78 600

**RP 16 100** Plastic retaining clip

**RP 28 500** Metal retaining clip